

Returnable and Reusable Crēdo[®] System

SCA Cool Logistics range of passive Vacuum Insulated Panels (VIP), Phase Change Material (PCM) Temperature Controlled Packaging from Minnesota Thermal Science (MTS) adds further strength and credibility to the existing product portfolio. This product range provides a truly reusable solution to meet your exacting environmental demands.

Crēdo[®] Thermal packaging solutions are available in all temperature ranges, +2°C to +8°C, +15°C to +25°C, -15°C to -25°C, (-40°C and colder are available upon request). These solutions consist of phase change materials, which, are specifically formulated for the unique needs of diverse medical materials, from super frozen tissue to room temperature and fridge temperature vaccines and pharmaceuticals.



Why Choose Crēdo[®] Systems?

- A new modular design provides efficiency in storage and simplicity in preparation and pack outs.
- The Thermal Isolation Chamber (TIC) – consists of six separate yet interlocking walls which completely surround the payload, providing greater temperature performance and overall payload protection.
- Customisable wall dimensions enable the Crēdo[®] range to be uniquely suited to varying packaging design requirements, resulting in significant savings in shipping costs and packing time.

Crēdo[®] 4
Temperature
+2°C to +8°C
Duration
Up to **169hrs**
Volume
Up to **865ltrs**

Crēdo[®] 22
Temperature
+15°C to +25°C
Duration
Up to **144hrs**
Volume
Up to **865ltrs**

Crēdo[®] 20M -20°C
Temperature
-20°C
Duration
Up to **155hrs**
Volume
Up to **865ltrs**

CREDO[®] containers offer a universal solution for temperature-sensitive materials, from blood and tissue to medical samples and pharmaceuticals.

Credo® Series 4 +2°C to +8°C

Code	Dimensions (mm)	Internal Vol (lts)	Total Weight (kgs)	Vol Weight (kgs)	Duration (hrs)
2L Series 4 2 72 (1.5 vip)	Int 152 x 127 x 108 Ext 276 x 251 x 241	2	4.4	3.8	74
4L Rep Shipper Bag Series 4 24 (1 vip)	Int 190 x 150 x 185 Ext 265 x 265 x 265	4	3.2	3.1	16
4L Series 4 4 96 (1 vip)	Int 152 x 152 x 152 Ext 318 x 267 x 267	4	5	3.8	84
12L Series 4 12 96 (1 vip)	Int 229 x 229 x 229 Ext 381 x 330 x 343	12	9.3	7.2	87
12L Series 4 12 168 (2 vip)	Int 229 x 229 x 229 Ext 445 x 406 x 406	12	14.4	12.3	169
17L Series 4 17 72 (1 vip)	Int 311 x 260 x 216 Ext 470 x 368 x 330	17	11.5	9.5	61
17L Series 4 17 144 (2 vip)	Int 311 x 260 x 216 Ext 527 x 426 x 400	17	16.7	14.9	141
17L Series 4 17 96 (1 vip pelican)	Int 311 x 260 x 216 Ext 533 x 533 x 489	17	21.6	23.1	80
28L Series 4 28 96 (1 vip)	Int 305 x 305 x 305 Ext 457 x 419 x 432	28	16	13.7	101
42L Series 4 42 96 (1 vip)	Int 457 x 305 x 305 Ext 603 x 419 x 432	42	20	18.1	116
56L Series 4 56 96 (1 vip)	Int 381 x 381 x 381 Ext 533 x 495 x 502	56	24.9	22.1	115
96L Series 4 96 96 (1 vip Pelican)	Int 457 x 457 x 457 Ext 686 x 686 x 660	96	47.7	51.7	128
Pallet Series 4 Half Stack	Int 1041 x 838 x 457 Ext 1219 x 1016 x 762	400	166	157	111
Pallet Series 4 Full Stack	Int 1041 x 838 x 990 Ext 1219 x 1016 x 1321	865	248	272	116

Credo® Series 22 +15°C to +25°C

Code	Dimensions (mm)	Internal Vol (lts)	Total Weight (kgs)	Vol Weight (kgs)	Duration (hrs)
2L Series 22 2 48 (1.5 vip)	Int 152 x 127 x 108 Ext 276 x 250 x 241	2	4.4	3.8	53
4L Series 22 4 96 (1 vip)	Int 152 x 152 x 152 Ext 318 x 267 x 267	4	5.1	3.8	45
12L Series 22 12 96 (1 vip)	Int 229 x 229 x 229 Ext 381 x 330 x 343	12	9.3	7.2	69
17L Series 22 17 96 (1 vip)	Int 311 x 260 x 216 Ext 470 x 368 x 330	17	11.9	9.5	54
17L Series 22 17 168 (2vip)	Int 311 x 260 x 216 Ext 527 x 426 x 400	17	17.1	14.9	87
28L Series 22 28 96 (1 vip)	Int 305 x 305 x 305 Ext 457 x 419 x 432	28	16.1	13.7	69
56L Series 22 56 96 (1 vip)	Int 381 x 381 x 381 Ext 533 x 495 x 502	56	25.4	22.1	60
96L Series 22 96 96 (1 vip Pelican)	Int 457 x 457 x 457 Ext 686 x 686 x 660	96	47.6	51.7	114
Pallet Series 22 Half Stack	Int 1041 x 838 x 457 Ext 1219 x 1016 x 762	400	166	157	144
Pallet Series 22 Full Stack	Int 1041 x 838 x 990 Ext 1219 x 1016 x 1321	865	248	272	144

Credo® Series 20M -20°C

Code	Dimensions (mm)	Internal Vol (lts)	Total Weight (kgs)	Vol Weight (kgs)	Duration (hrs)
4L Series 20m 4 72 (1 vip)	Int 152 x 152 x 152 Ext 318 x 267x 267	4	6	3.8	60
4L Series 20m 4 96 (2 vip)	Int 152 x 152 x 152 Ext 381 x 330 x 343	4	8.8	7.2	111
12L Series 20m 12 96 (1 vip)	Int 229 x 229 x 229 Ext 381 x 330 x 343	12	11.4	7.2	89
12L Series 20m 12 168 (2 vip)	Int 229 x 229 x 229 Ext 445 x 406 x 406	12	15.7	12.3	155
17L Series 20m 17 72 (1 vip)	Int 311 x 260 x 216 Ext 470 x 368 x 330	17	13.2	9.5	66
12L Series 20m 17 120 (2 vip)	Int 311 x 260 x 216 Ext 527 x 426 x 400	17	18.3	14.9	135
17L Series 20m 17 96 (1 vip Pelican)	Int 311 x 260 x 216 Ext 533 x 533 x 489	17	23.2	23.1	101
28L Series 20m 28 96 (1 vip)	Int 305 x 305 x 305 Ext 457 x 419 x 432	28	19.1	13.7	94
56L Series 20m 56 96 (1 vip)	Int 381 x 381 x 381 Ext 533 x 495 x 502	56	30.2	22.1	122
Pallet Series 20m Half Stack	Int 1041 x 838 x 457 Ext 1219 x 1016 x 762	400	166	157	-
Pallet Series 20m Half Stack	Int 1041 x 838 x 990 Ext 1219 x 1016 x 1321	865	248	272	-



Returnable and reusable, making Credo a truly environmentally friendly option.


The Thermal Isolation Chamber (TIC) consists of interlocking walls, providing greater temperature performance and overall payload protection.

Ensuring product integrity is maintained every time.

Tested to ISTA standards the CREDO® series is ready for real world action.

The full range of Credo® profiles are available upon request.

Credo® 12 Litre – Series 4 12 96 ISTA 7D Winter Profile

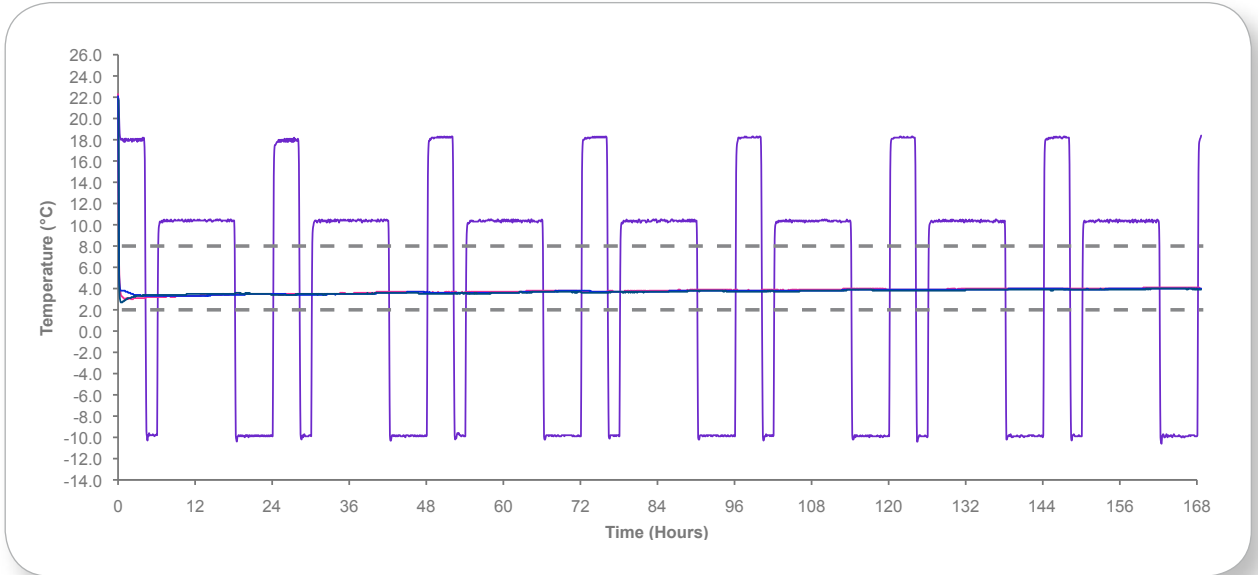

Credo® 12 Litre – Series 4 12 96 ISTA 7D Summer Profile

